AVJ Series High Frequency Solenoid Valve




AVJ3220-D-I-03-X130



AVJ3220-D-I-01-X203



AVJ3220-D-I-02-X208



Ordering Code AVJ Series High Frequency Solenoid Valve

AVJ322 0 D - I - 03 - X130

- AVJ322 — Type code: AVJ: High frequency valve
- 0 — Standard voltage: DC24V, DC48V
- D — Voltage range: ±10%
- I — Valve body: Aluminum
- 03 — Joint size: 01: G1/8, 02: G1/4, 03: G3/8
- X130 — Series code: X130: 1 in 1 out, X203: 1 in 3 out, X208: 1 in 5 out

Specifications


Model	AVJ3220-D-I-03-X130	AVJ3220-D-I-01-X203	AVJ3220-D-I-02-X208
Working medium	Clean air (40μm filteration)		
Acting type	Direct acting		
Control type	Normal close		
Working pressure	0 to 0.6MPa	0 to 0.7MPa	0 to 0.6MPa
Max. Working pressure	0.8MPa		
Working temperature	-5 to 70℃		
Response time	≤5ms	≤4.5ms	≤5ms
Max. Working frequency	100Hz		
Orifice	8mm	7.5mm	8mm
Joint size	G3/8	G1/8	G1/4, G1/8
Lubrication	No		
Heat resistant grade	H		
Protective class	IP65		
Standard voltage	DC24V DC48V		
Voltage range	±10%		
Valve body	Aluminum		
Seal material	TPU		

VPC PNEUMATIC®
ISO9001 CE


AVJ Series High Frequency Solenoid Valve

Main Dimensions

AVJ3220-D-I-03-X130

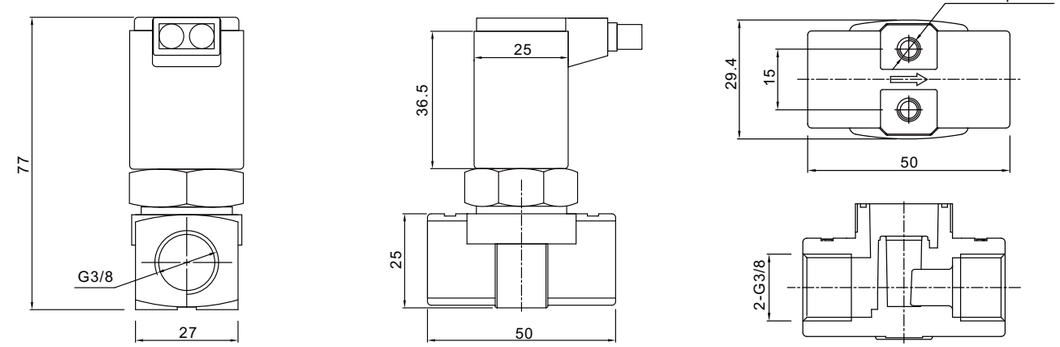

AVJ3220-D-I-01-X203

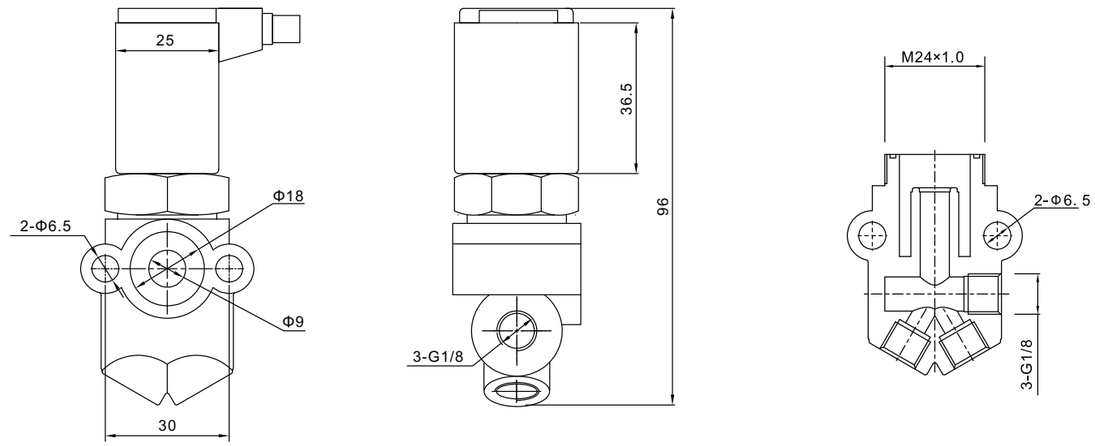

AVJ3220-D-I-02-X208

